



耐圧防爆構造ユニオンカップリング

SUM-16~104(おねじ×めねじ)型

d2

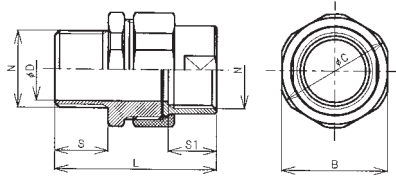

| 型式 | N | φD | S | S1 | B | φC | L | 重量(kg) | 納期目安 |
|--------|----------|----|----|----|----|----|----|--------|------|
| SUM-16 | PF 1/2 | 15 | 19 | 17 | 34 | 37 | 59 | 0.2 | ◎ |
| SUM-22 | PF 3/4 | 21 | 19 | 17 | 41 | 44 | 59 | 0.2 | ◎ |
| SUM-28 | PF 1 | 27 | 23 | 21 | 46 | 49 | 71 | 0.3 | ◎ |
| SUM-36 | PF 1 1/4 | 35 | 23 | 22 | 58 | 63 | 74 | 0.7 | ◎ |
| SUM-42 | PF 1 1/2 | 40 | 23 | 25 | 67 | 71 | 79 | 0.9 | ◎ |
| SUM-54 | PF 2 | 52 | 23 | 29 | 83 | 87 | 86 | 1.5 | ◎ |

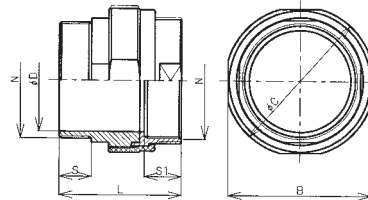


| 型式 | N | φD | S | S1 | B | φC | L | 重量(kg) | 納期目安 |
|---------|----------|-----|----|----|-----|-----|-----|--------|------|
| SUM-70 | PF 2 1/2 | 66 | 25 | 29 | 96 | 100 | 94 | 1.5 | ◎ |
| SUM-82 | PF 3 | 78 | 27 | 29 | 112 | 117 | 96 | 1.6 | ◎ |
| SUM-92 | PF 3 1/2 | 88 | 28 | 32 | 124 | 129 | 106 | 2.7 | ◎ |
| SUM-104 | PF 4 | 100 | 28 | 32 | 140 | 145 | 106 | 3.3 | ◎ |


| | |
|------|-------------|
| 主材質 | 鋼(ステンレス鋼も可) |
| 表面処理 | 電気亜鉛メッキ |

SUF-16~104(めねじ×めねじ)型

d2

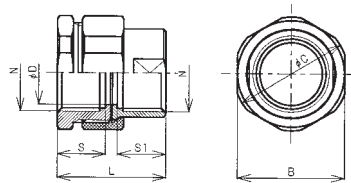

| 型式 | N | φD | S | S1 | B | φC | L | 重量(kg) | 納期目安 |
|--------|----------|----|----|----|----|----|----|--------|------|
| SUF-16 | PF 1/2 | 15 | 17 | 17 | 34 | 37 | 40 | 0.2 | ◎ |
| SUF-22 | PF 3/4 | 21 | 17 | 17 | 41 | 44 | 40 | 0.2 | ◎ |
| SUF-28 | PF 1 | 27 | 21 | 21 | 46 | 49 | 48 | 0.3 | ◎ |
| SUF-36 | PF 1 1/4 | 35 | 22 | 22 | 58 | 63 | 51 | 0.5 | ◎ |
| SUF-42 | PF 1 1/2 | 40 | 24 | 25 | 67 | 71 | 56 | 0.7 | ◎ |
| SUF-54 | PF 2 | 52 | 25 | 29 | 83 | 87 | 63 | 1.1 | ◎ |

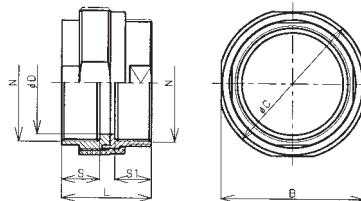

| 型式 | N | φD | S | S1 | B | φC | L | 重量(kg) | 納期目安 |
|---------|----------|-----|----|----|-----|-----|----|--------|------|
| SUF-70 | PF 2 1/2 | 66 | 28 | 29 | 96 | 100 | 68 | 1.3 | ◎ |
| SUF-82 | PF 3 | 78 | 28 | 29 | 112 | 117 | 68 | 1.8 | ◎ |
| SUF-92 | PF 3 1/2 | 88 | 28 | 32 | 124 | 129 | 78 | 2.0 | ◎ |
| SUF-104 | PF 4 | 100 | 28 | 32 | 140 | 145 | 78 | 2.7 | ◎ |

| | |
|------|-------------|
| 主材質 | 鋼(ステンレス鋼も可) |
| 表面処理 | 電気亜鉛メッキ |