
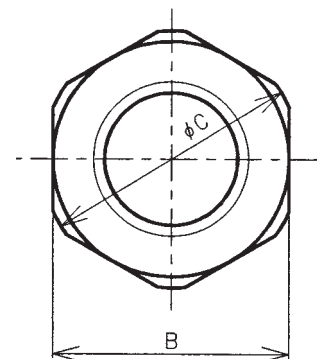


SA22-16~104-92型

d2

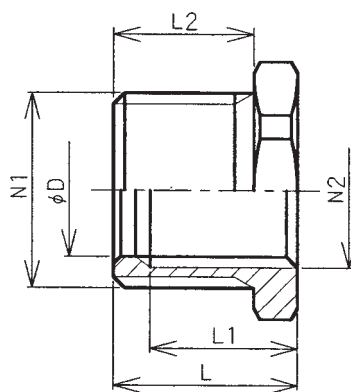

主 材 質	鋼(ステンレス鋼・黄銅も可)
表面処理	電気亜鉛メッキ

●1段

型式	N1	N2	φD	B	φC	L1	L2	L	重量 (kg)	納期目安
SA22-16	PF 3/4	PF 1/2	16	32	35	22	19	25	0.05	◎
SA28-22	PF 1	PF 3/4	24.1	35	38	20	21	26	0.07	◎
SA36-28	PF 1 1/4	PF 1	30.3	46	50	20	21	26	0.12	◎
SA42-36	PF 1 1/2	PF 1 1/4	39	50	54	20	21	26	0.12	◎
SA54-42	PF 2	PF 1 1/2	44.8	63	67	20	21	26	0.24	◎
SA70-54	PF 2 1/2	PF 2	56.7	77	80	22	22	28	0.43	◎
SA82-70	PF 3	PF 2 1/2	72.2	91	94	25	25	32	0.50	◎
SA92-82	PF 3 1/2	PF 3	84.9	105	109	25	25	32	0.56	◎
SA104-92	PF 4	PF 3 1/2	97.4	115	119	25	25	32	0.68	◎

●2段

型式	N1	N2	φD	B	φC	L1	L2	L	重量 (kg)	納期目安
SA28-16	PF 1	PF 1/2	18.6	35	38	20	21	26	0.10	◎
SA36-22	PF 1 1/4	PF 3/4	24.1	46	50	20	21	26	0.17	◎
SA42-28	PF 1 1/2	PF 1	30.3	50	54	20	21	26	0.19	◎
SA54-36	PF 2	PF 1 1/4	39	63	67	20	21	26	0.29	◎
SA70-42	PF 2 1/2	PF 1 1/2	44.8	77	80	22	22	28	0.60	◎
SA82-54	PF 3	PF 2	56.7	91	94	25	25	32	0.85	◎
SA92-70	PF 3 1/2	PF 2 1/2	72.2	105	109	25	25	32	0.93	◎
SA104-82	PF 4	PF 3	84.9	115	119	25	25	32	1.10	◎

●3段


型式	N1	N2	φD	B	φC	L1	L2	L	重量(kg)	納期目安
SA36-16	PF 1 1/4	PF 1/2	18.6	46	50	20	21	26	0.21	◎
SA42-22	PF 1 1/2	PF 3/4	24.1	50	54	20	21	26	0.25	◎
SA54-28	PF 2	PF 1	30.3	63	67	20	21	26	0.40	◎
SA70-36	PF 2 1/2	PF 1 1/4	39	77	80	22	22	28	0.66	◎
SA82-42	PF 3	PF 1 1/2	44.8	91	94	25	25	32	1.10	◎
SA92-54	PF 3 1/2	PF 2	56.7	105	109	25	25	32	1.32	◎
SA104-70	PF 4	PF 2 1/2	72.2	115	119	25	25	32	1.43	◎

※3段以上も製作出来ますので、お問合せください。

耐圧防爆構造アダプター・レジューサー

SR16-22~92-104型

d2

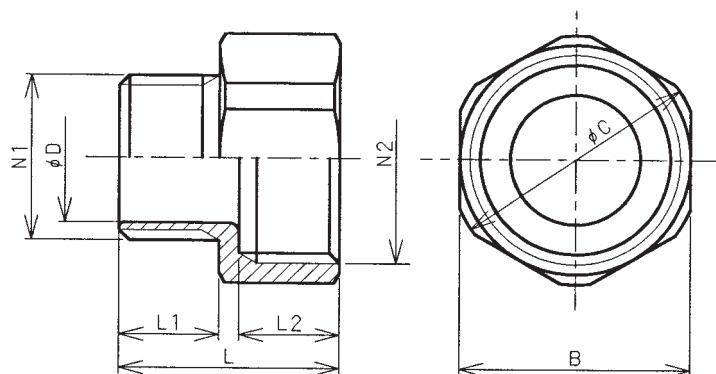

主 材 質	銅 (ステンレス鋼・黄銅も可)
表面処理	電気亜鉛メッキ

●1段

型式	N1	N2	φD	B	φC	L1	L2	L	重量 (kg)	納期目安
SR16-22	PF 1/2	PF 3/4	15	32	35	16	16	35	0.08	◎
SR22-28	PF 3/4	PF 1	20	38	41	16	20	40	0.12	◎
SR28-36	PF 1	PF 1 1/4	26	46	50	20	20	44	0.24	◎
SR36-42	PF 1 1/4	PF 1 1/2	34	54	58	20	20	44	0.28	◎
SR42-54	PF 1 1/2	PF 2	39	67	73	20	20	44	0.32	◎
SR54-70	PF 2	PF 2 1/2	51	82	85	20	20	44	0.35	◎
SR70-82	PF 2 1/2	PF 3	62	99	103	25	25	56	0.79	◎
SR82-92	PF 3	PF 3 1/2	79	110	114	25	25	56	0.91	◎
SR92-104	PF 3 1/2	PF 4	88	124	128	25	25	56	1.14	◎

●2段

型式	N1	N2	φD	B	φC	L1	L2	L	重量 (kg)	納期目安
SR16-28	PF 1/2	PF 1	15	38	41	16	20	40	0.11	◎
SR22-36	PF 3/4	PF 1 1/4	20	46	50	16	20	40	0.14	◎
SR28-42	PF 1	PF 1 1/2	26	54	58	20	20	44	0.21	◎
SR36-54	PF 1 1/4	PF 2	34	67	73	20	20	44	0.33	◎
SR42-70	PF 1 1/2	PF 2 1/2	39	82	85	20	20	44	0.40	◎
SR54-82	PF 2	PF 3	51	99	103	25	25	56	0.68	◎
SR70-92	PF 2 1/2	PF 3 1/2	67	110	114	25	25	56	0.98	◎
SR82-104	PF 3	PF 4	79	124	128	25	25	56	1.12	◎

●3段

型式	N1	N2	φD	B	φC	L1	L2	L	重量 (kg)	納期目安
SR16-36	PF 1/2	PF 1 1/4	15	46	50	16	20	40	0.14	◎
SR22-42	PF 3/4	PF 1 1/2	20	54	58	16	20	40	0.20	◎
SR28-54	PF 1	PF 2	26	67	73	20	20	44	0.31	◎
SR36-70	PF 1 1/4	PF 2 1/2	34	82	85	20	20	44	0.40	◎
SR42-82	PF 1 1/2	PF 3	39	99	103	25	25	56	0.65	◎
SR54-92	PF 2	PF 3 1/2	51	110	114	25	25	56	0.70	◎
SR70-104	PF 2 1/2	PF 4	67	124	128	25	25	56	1.13	◎

※3段以上も製作出来ますので、お問合せください。